


**SPECIFICATION SHEET**

**CABLE FLASHING**

**MODEL CG**

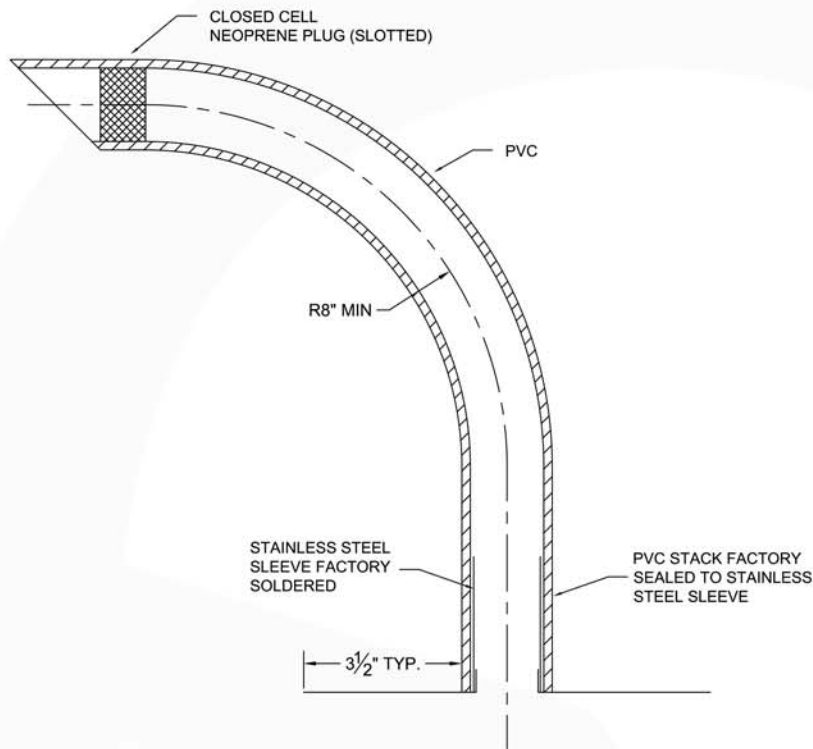

**Model CG**

All models are one-piece / slipover.

**Intended Use:**

Used to address coaxial and lightning protection cables entering/exiting the building through the roof or wall.

**Advantages and Unique Features:**

1. Provides excellent watertight seal at roof plane with all types of roof materials.
2. Requires absolutely no maintenance.

**Materials:**

1. Roof flange and stack flashing: 26 Ga. stainless steel type 304 2B finish. ASTM A240
2. Gooseneck: PVC Conduit UL 651
3. 50% lead / 50% tin ASTM B32 or specify non lead solder ASTM 96.5TS

**Available Models:**

- CG125
- CG150
- CG200

**PROUDLY MADE IN THE USA**